



Name \_\_\_\_\_ Date \_\_\_\_\_ Track / City \_\_\_\_\_ Event \_\_\_\_\_

### Front Suspension:

#### Shock Position:




#### Upper Arm Position:



#### 4.8mm Ball Stud:

- 97050M(Std)  
 UM129




#### Upper Spacer: \_\_\_\_\_ mm

#### Camber \_\_\_\_\_ °


- +

#### Spacer: \_\_\_\_\_ mm

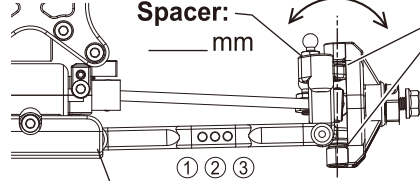

#### Shock Position:


#### Bump Steer Spacer: \_\_\_\_\_ mm



**Toe:**  
 In  
 Out \_\_\_\_\_ °

**Sway Bar:**  
 None  
 \_\_\_\_\_ mm

**Ackerman Spacer:** \_\_\_\_\_ mm



#### Lower Sus Holder Block:

Front \_\_\_\_\_ Rear \_\_\_\_\_

#### Lower Sus Holder Spacer:

Front \_\_\_\_\_ mm Rear \_\_\_\_\_ mm

Comments: \_\_\_\_\_

#### Axle-Height Spacer:

- Up  
 Down

#### Caster Block:

- 7°  
 10°

#### Wheelbase:

Front \_\_\_\_\_ mm

Rear \_\_\_\_\_ mm

### Front Diff:


- Gear Diff. # \_\_\_\_\_  
 Ball Diff. \_\_\_\_\_

### Rear Suspension:

#### Shock Position:




#### Upper Arm Position:



#### 4.8mm Ball Stud:

- 97050M(Std)  
 UM129




#### Upper Spacer: \_\_\_\_\_ mm

#### Camber \_\_\_\_\_ °

- +


#### Sus. Arm:

- LA272(Std)  
 UM713  
 \_\_\_\_\_

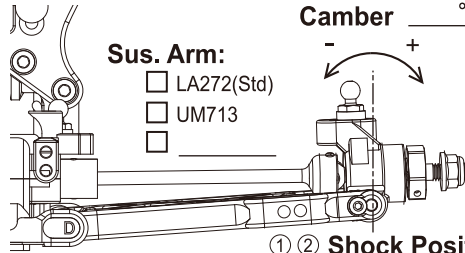

#### Shock Position:


#### Hub Carrier:



Type-B (UM519)

Type-B2 (UM519-2)

#### Upper Spacer: \_\_\_\_\_ mm



- 0°Type-B(UM519)  
 0°Type-B2(UM519-2)  
 0°Alu(UMW704-0)  
 0.5°Alu(UMW704-05)  
 1°Alu(UMW704-1)  
 \_\_\_\_\_

#### Sway Bar:

- None  
 \_\_\_\_\_ mm

#### Lower Sus Holder Block:


Front \_\_\_\_\_ Rear \_\_\_\_\_

#### Lower Sus Holder Spacer:

Front \_\_\_\_\_ mm Rear \_\_\_\_\_ mm

Comments: \_\_\_\_\_

#### Toe In: \_\_\_\_\_ °



#### Wheelbase:

Front: \_\_\_\_\_ mm

Rear: \_\_\_\_\_ mm

### Slipper Type:

- Separates  Direct

### Rear Diff:

- Gear Diff. # \_\_\_\_\_  
 Ball Diff. \_\_\_\_\_

### Shock:

Front

Rear

#### Shock Piston: \_\_\_\_\_

#### Shock Oil: # \_\_\_\_\_ # \_\_\_\_\_

#### Shock Spring: \_\_\_\_\_

#### Limiters:

in out mm mm

in out mm mm


#### Shock Length(A): \_\_\_\_\_ mm \_\_\_\_\_ mm

#### Shock Top Type: Alu(UM719/Std) UM753-1

#### 5.8mm Ball End:


Front:  S  M  L

Rear:  S  M  L



### Chassis:

#### Ride Height:

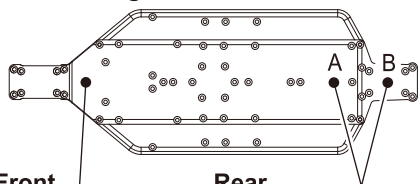

Front \_\_\_\_\_ mm

Rear  A  B \_\_\_\_\_ mm

#### Tire:

Front

Rear

#### Tire: \_\_\_\_\_

#### Compound: \_\_\_\_\_

#### Inserts: \_\_\_\_\_

#### Wheel: \_\_\_\_\_

#### Notes: \_\_\_\_\_

#### Comment: \_\_\_\_\_

### Electronics:

**Battery:**  Saddle  Short

**Motor Position:**  Front  
 Rear

**Servo Mounting:**  Straight  
 Sideways

**Motor:** \_\_\_\_\_

**Motor Timing:** \_\_\_\_\_

**Pinion/Spur:** \_\_\_\_\_

**ESC:** \_\_\_\_\_

**Setting:** \_\_\_\_\_

**Radio:** \_\_\_\_\_

**Servo:** \_\_\_\_\_

- Smooth  Sandy  
 Bumpy  Soft Dirt  
 Low Traction  Grass  
 Med.Traction  BlueGroove  
 High Traction  Clay  
 Wet  Dusty  
 Dry  \_\_\_\_\_

### Body / Wing:

#### Body:

#### Wing Mount:

- Narrow  Wide

#### Wing Dum Height:

\_\_\_\_\_ mm

#### Wing:

#### Wing Angle:

- 4°  7°  10°

#### Lip Height:

\_\_\_\_\_ mm

### Material:

**Screw:**  Steel  Titanium

**Pinion Gear:**  Steel  Aluminium

**Shock O-Ring:**  O-ring  X-ring  Red  Clear