

Name _____ Date _____ Track / City _____ Event _____

Front Suspension:

Shock Position:



Shock Stay:

- Std.
- Carbon (LAW58)
- Other _____

Lower Sus Holder Block:


Front _____ Rear _____

Lower Sus Holder Spacer:

Front _____ mm Rear _____ mm

Comments: _____

Upper Arm Position:



4.8mm Ball Stud:

- 97050M(Std)
- UM129

Upper Spacer: _____ mm

Camber _____ °

Spacer:

_____ mm

Axle-Height Spacer:

- Up
- Down

Caster Block:


- 7°
- 10°

Shock Position:

Wheelbase: Front _____ mm

Rear _____ mm

Bump Steer Spacer:



_____ mm

Toe:

- In _____ °
- Out _____ °

Sway Bar:

- None
- _____ mm

Ackerman Spacer:


_____ mm

Front Diff:

- Gear Diff. # _____
- Ball Diff. _____

Rear Suspension:

Shock Position:



Shock Stay:

- Std.
- Carbon (LAW59)
- Other _____

Wing Stay Position:

Lower Sus Holder Block:


Front _____ Rear _____

Lower Sus Holder Spacer:

Front _____ mm Rear _____ mm

Comments: _____

Upper Arm Position:



4.8mm Ball Stud:

- 97050M(Std)
- UM129

Upper Spacer: _____ mm


Toe In: _____ °

Sus. Arm:

- LA272(Std)
- UM713B

Camber _____ °

Hub Carrier:



Type-B (UM519)

Type-B2 (UM519-2)


Upper Spacer: _____ mm

Wheelbase:

Front _____ mm

Rear _____ mm

Shock Position:



Wheelbase:

Front: _____ mm

Rear: _____ mm

Center Drive :

- Diff. Gear # _____
- Slipper Clutch
- Separates
- Direct

Shock:

Front

Rear

Shock Piston:

Shock Oil:

_____ # _____

Shock Spring:

Limiters:

in out mm mm in out mm mm

Shock Length (A):


_____ mm _____ mm

Shock Top Type:


- Alu. (UM719/Std)
- UM753-1

5.8mm Ball End:

- Front: S M L
- Rear: S M L



Chassis:

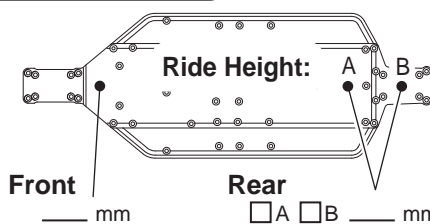

Front _____ mm

Rear _____ mm

Tire:

Front _____

Rear _____

Tire:

Compound: _____

Inserts: _____

Wheel: _____

Note: _____

Electronics:

- Battery: Saddle Pack Short

- Motor Position: Front Rear

- Servo Mounting: Straight Sideways Aluminum (LAW56)

- Motor Mount Position: Std 8mm Front

- Battery Position: Std 8mm Front

Motor: _____

Pinion / Spur: _____

ESC: _____

Body / Wing:

Body:

Wing Mount:

- Narrow
- Wide

Wing Dum Height:

_____ mm

Wing:

Wing Angle:

- 4°
- 7°
- 10°

Lip Height:

_____ mm

Material:

- Screw: Steel Titanium

Pinion Gear:

- Steel
- Aluminum

Shock O-Ring:

- O-ring
- X-ring
- Red
- Clear

Track Condition

- Smooth
- Bumpy
- Low Traction
- Med. Traction
- Higt Traction
- Wet
- Dry
- Sandy
- Soft Dirt
- Grass
- Blue Groove
- Clay
- Dusty
- _____